



RG-AP680P-L

Wi-Fi 6 Dual-Radio
Access Point

01

Product Overview

The RG-AP680P-L is an 802.11ax-compliant dual-radio wireless access point (AP) provided by Ruijie Networks and is fit for higher education, wireless city, energy, and plaza scenarios.

It complies with 802.11ax, 802.11ac Wave2, 802.11ac Wave1, and 802.11n. With a hardware-independent dual-radio design, the RG-AP680P-L can provide a data rate of up to 5.951 Gbps. The ultra-fast wireless rate eliminates the performance bottleneck.

The design of the RG-AP680P-L considers factors such as wireless network security, radio control, mobile access, QoS, seamless roaming, and Internet of Things (IoT) scalability. With Ruijie's access controller (AC) and Ruijie Cloud servers, the RG-AP680P-L can implement wireless client data forwarding, security features, access control, and IoT application extension.

The RG-AP680P-L adopts IP68 rated housing. It is applicable to harsh outdoor environments and easy to install and maintain.

02


Product Appearance



Front View



Right View



Rear View

03

Product Highlights

- Wi-Fi 6 certification
- Data rate of up to 5.951 Gbps and concurrent dual-radio design
- Built-in smart omnidirectional antenna
- Excellent environmental adaptability: IP68, -40°C to +65°C (-40°F to +149°F), and 6 kV surge protection
- OFDMA, MU-MIMO technologies for minimal wireless signal interference
- Hybrid management: support for thousands of standalone APs, and AC management and public cloud deployment options
- Mobile management: free mobile applications for Ruijie Cloud customers

04

Product Features

Multiple Service Ports

The RG-AP680P-L supports dual uplink Ethernet ports: one 100/1000/2500/5000Base-T Ethernet electrical port and one 1 G/2.5 G/10 G Ethernet optical port.

The auto-negotiation Ethernet optical port provide a maximum data rate of 10 Gbps, guaranteeing high-speed transmission of service data between wireless and wired networks.

High-speed Wireless Access for Better Experience

The RG-AP680P-L optimizes user experience by maximizing Wi-Fi utilization and substantially reducing airtime competition between clients. It provides Orthogonal Frequency-Division Multiple Access (OFDMA) and Multi-User Multiple-Input Multiple-Output (MU-MIMO). With up to 4 spatial streams (4SS) and 160 MHz channel bandwidth (HE160), the RG-AP680P-L delivers the data rate of up to 4.804 Gbps at 5 GHz band, providing pioneering wireless capabilities for enterprises.

1024-QAM High-Speed Access

The RG-AP680P-L adopts the dual-radio design and complies with the next-generation Wi-Fi standard IEEE 802.11ax. When dual radios are enabled, it can provide a wireless data rate of up to 5.951 Gbps to realize high-speed access experience.

OFDMA High-Density User Access

OFDMA enables the RG-AP680P-L to divide a WLAN channel into multiple narrower sub-channels, with each user occupying one or more sub-channels. The RG-AP680P-L can schedule services of multiple users, and receive and send packets concurrently. This reduces contention for air interface resources and backoff, shortens the network latency, and improves the network efficiency.

MU-MIMO

The RG-AP680P-L maximizes the use of MU-MIMO,

which can effectively improve the throughput of a wireless network by exchanging data with multiple single-stream or dual-stream client devices simultaneously.

Diverse Wi-Fi Technologies

It supports RF transmission technologies:

- Dynamic frequency selection (DFS) optimizes the use of available RF spectrum to prevent radar channel interference.
- Cyclic delay/shift Diversity (CDD/CSD) improves downlink RF performance, and converts spatial diversity to frequency diversity to avoid intersymbol interference, thus reducing bit error rate (BER) and effectively reducing signal distortion.
- Maximum ratio combining (MRC) improves the signal quality at the receiving end and enhances reliability and performance of received signals.

It supports RF channel coding technologies:

- Space-time block coding (STBC) increases the range and improves signal receiving, and enhances reliability of data transmission.
- Low-density parity check (LDPC) corrects errors efficiently and improves the throughput.
- Transmit beam-forming (TxBF) expands the signal coverage and enhances the reliability of specific devices, thereby improving the data rate.

Intelligent Optimization, Reliability Guarantee

Intelligent Recognition, One-Click Network Optimization

The RG-AP680P-L can intelligently identify mobile clients such as iOS and Android clients and PCs. It can be used to implement visualized wireless network management based on the wireless client type and optimize a network in one-click mode.

The RG-AP680P-L embeds client experience

measurement and environment collection capability. It can be used with the RG-WS wireless access controller for intelligent analysis and automatic RF resource scheduling. It can adjust the RF power and intelligently allocate channels to solve problems such as co-channel interference, adjacent channel interference, and roaming stickiness.

Intelligent Local Forwarding

The RG-AP680P-L integrates intelligent local forwarding technology and eliminates the traffic bottleneck on its connected wireless access controller. The data forwarding mode of the RG-AP680P-L can be flexibly pre-configured through Ruijie's wireless access controller. Then the RG-AP680P-L determines whether data needs to be forwarded by the AC or be sent to a wired network for data exchange based on the SSID or user VLAN.

With the local forwarding technology, the RG-AP680P-L classifies the data that is sensitive to the delay and requires real-time high-performance transmission, and forwards it through a wired network. This greatly relieves the traffic burden of the wireless access controller and better adapts to heavy-traffic transmission on 802.11ax networks.

Client Access Optimization

The RG-AP680P-L can dynamically measure parameters such as the uplink Received Signal Strength Indicator (RSSI), noise floor, and channel utilization to intelligently identify the client network status. Moreover, it can steer clients to preferentially connect to 5 GHz or APs with better experience. This solves the problems of roaming stickiness, remote association, and load imbalance, and improves user experience.

Advanced Network Coexistence

The RG-AP680P-L supports advanced network coexistence. It uses the built-in filter to automatically minimize the impact of interference from non-Wi-Fi network devices.

Abundant QoS Policies

The RG-AP680P-L provides abundant QoS policies. It supports bandwidth limiting based on the

WLAN, AP, and STA, and provides Wi-Fi Multimedia (WMM) that defines priorities for different service data. Therefore, it implements immediate and quantitative transmission of audio and video data, and guarantees smooth application of multimedia services.

The multicast-to-unicast technology supported by the RG-AP680P-L solves the video freezing problem caused by packet loss or long latency in Video on Demand (VoD) and other multicast applications on a wireless network. It enhances the experience in the use of multicast video services on a wireless network.

Green Design and Low Power Consumption

The RG-AP680P-L incorporates packet-based power control technology. With high-performance power design, the RG-AP680P-L is energy-efficient while providing high-speed wireless access services.

Rich IoT Platform Features

The RG-AP680P-L integrates Bluetooth 5.1 and 802.15.4 RF to simplify deployment and management of IoT-based location services, asset tracking services, security solutions, and IoT sensors. It allows access through Bluetooth serial ports.

Comprehensive Security Protection and Ease of Use

Comprehensive Wireless Security Protection

The RG-AP680P-L supports WEP (64/128 bits), WPA-TKIP, WPA-PSK, WPA2-AES, WPA3 authentication and encryption methods. The WPA3 types include WPA3-Personal (SAE), WPA3-Personal mixed mode, and WPA3-Enterprise (CCMP, 128 bits).

The RG-AP680P-L used with the RG-WS series wireless access controller can provide a series of wireless security protection functions such as anti-ARP spoofing, and DHCP protection, to build a secure and reliable wireless network.

Multiple Easy-to-Use Authentication Modes

Together with Ruijie authentication system or multi-service AC, the RG-AP680P-L supports a variety of

efficient and easy authentication modes such as web, 802.1X, MAC address bypass (MAB), SMS, and QR code-based guest authentication. It conforms to the principle of authentication security upon network access.

MAB authentication frees the client from entering the username and password repeatedly. The username and password are required only upon the first login.

When a guest accesses a wireless network through SMS authentication, an authentication page pops up. On the authentication page, a guest can register an account using the mobile number, and accesses the Internet using the username and password in the SMS received.

QR code-based authentication is easy for guests to access the Internet. After accessing a wireless network, guests can receive a QR code prompt. They can access the network after being authorized by the visited employee, providing better security.

Flexible Device Management Modes

Flexible Switching Between Fat, Fit, and Cloud Modes

The RG-AP680P-L supports flexible switchover among Fat, Fit, and cloud deployment modes. When the RG-AP680P-L is deployed in Fat and


cloud mode, it can operate as a single device and be managed by the local access controller (AC). It can also be connected to the Ruijie public cloud for cloud-based management. When the RG-AP680P-L is deployed in Fit mode, it can be used with the AC to achieve more functions. In Fit mode, the RG-AP840-L can be deployed through Zero Touch Provisioning (ZTP). In addition, complete remote management also greatly enhances the O&M management efficiency of a wireless network.

Bluetooth Serial Port for Easy Maintenance

The RG-AP680P-L supports switching between Bluetooth serial port and iBeacon. If the Bluetooth serial port is used by default, a network administrator can manage the device through the mobile phone upon device faults, without onsite device maintenance.

Mobile Monitoring and Optimization

You can use the free Ruijie Cloud App to achieve simple network management experience. This app features unified device lifecycle management, switches, and security gateways. The app also simplifies device configuration, monitoring, and optimization. For details, visit official website at <https://www.ruijienetworks.com/products/smb/cloud-service/cloud-service/ruijie-cloud-solution/mobile-app>.

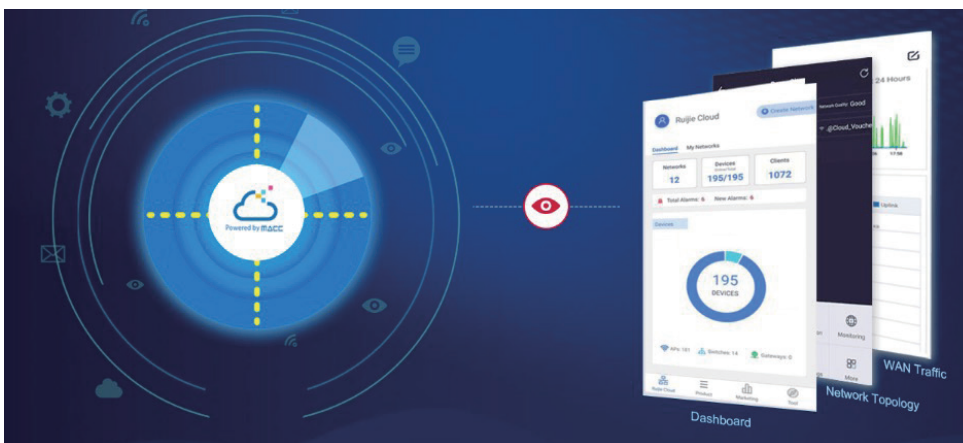

All-in-One for Small Branch Office

In small branch office scenarios, the RG-AP680P-L serves as an AP to provide the wireless access service for the office area, and also functions as a VPN gateway. This all-in-one design simplifies network deployment and saves building costs.

PPPoE


The RG-AP680P-L can function as a PPPoE client and connects to the Internet through PPPoE. In this case, no gateway needs to be deployed in a branch office area for Internet access.

NAT

The RG-AP680P-L supports the Network Address Translation (NAT) function to translate addresses between the LAN in the branch office and the Internet.

IPsec VPN

The RG-AP680P-L can establish IPsec VPN tunnels between the headquarters and branch offices to implement LAN interconnection.

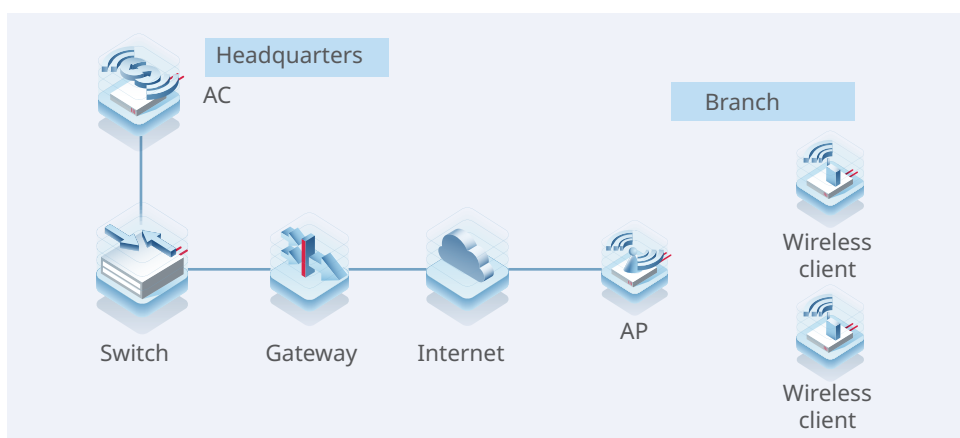

05

Specifications

Hardware Specifications

Dimensions and Weight

Dimensions and Weight	RG-AP680P-L
Unit dimensions(W x D x H)	300 mm x 300 mm x 94 mm (11.81 in. x 11.81 in. x 3.70 in.)
Shipping dimensions(W x D x H)	470 mm x 410 mm x 170 mm (18.50 in. x 16.14 in. x 6.69 in.)
Unit weight	Main unit: 3.3 kg (7.28 lbs) Mounting bracket: 1.2 kg (2.65 lbs)
Shipping weight	6.5 kg (14.33 lbs)
Mounting	Wall/Pole-mount (a mounting bracket is delivered with the main unit)

Wi-Fi Radio

Wi-Fi Radio	RG-AP680P-L
Radio design	Dual-radio and eight spatial streams: - Radio 1: 2.4 GHz, four spatial streams, 4x4 MU-MIMO - Radio 2: 5 GHz, four spatial streams, 4x4 MU-MIMO

Wi-Fi Radio	RG-AP680P-L
Operating frequencies	Radio 1: 802.11b/g/n/ax 2.400 GHz to 2.4835 GHz, channels 1 to 13 Radio 2: 802.11a/n/ac/ax 5.150 GHz to 5.250 GHz, U-NII-1, channels 36, 40, 44, and 48 5.250 GHz to 5.350 GHz, U-NII-2A, channels 52, 56, 60, and 64 5.470 GHz to 5.725 GHz, U-NII-2C, channels 100, 104, 108, 112, 116, 120, 124, 128, 132, 136, and 140 5.725 GHz to 5.850 GHz, U-NII-3/ISM, channels 149, 153, 157, 161, and 165 Note: Available frequency bands may vary with countries or regions. To use the above-mentioned frequency bands, ensure that they are supported in your country or region. For details, see WLAN Country or Region Codes and Channel Compliance .
Data rates	Combined peak data rate: 5.951 Gbps Radio 1: 2.4 GHz, 1.147 Gbps - Four spatial stream Single User (SU) MIMO for up to 1.147 Gbps wireless data rate to individual 4SS HE40 802.11ax client devices (maximum) - Four spatial stream Single User (SU) MIMO for up to 574 Mbps wireless data rate to individual 4SS HE20 802.11ax client devices (typical) Radio 2: 5 GHz, 4.804 Gbps - Four spatial stream Single User (SU) MIMO for up to 4.804 Gbps wireless data rate to individual 4SS HE160 802.11ax client devices (maximum) - Four spatial stream Single User (SU) MIMO for up to 2.402 Gbps wireless data rate to individual 4SS HE80 802.11ax client devices (typical) - Four spatial stream Multi-User (MU) MIMO for up to 4.804 Gbps wireless data rate to up to four 1SS HE160 802.11ax DL-MU-MIMO capable client devices simultaneously (maximum) - Four spatial stream Multi-User (MU) MIMO for up to 2.402 Gbps wireless data rate to up to four 1SS HE80 802.11ax DL-MU-MIMO capable client devices simultaneously (typical)
Data rate set	The following 802.11-compliant data rates in Mbps are supported: 2.4 GHz radio 802.11b: 1, 2, 5.5, 11 802.11g: 1, 2, 5.5, 6, 9, 11, 12, 18, 24, 36, 48, 54 802.11n: 6.5 to 600 (MCS0 to MCS31, HT20 to HT40) 802.11ax: 8.6 to 1147 (MCS0 to MCS11, NSS = 1 to 4, HE20 to HE40) 5 GHz radio 802.11a: 6, 9, 12, 18, 24, 36, 48, 54 802.11n: 6.5 to 600 (MCS0 to MCS31, HT20 to HT40) 802.11ac: 6.5 to 3467 (MCS0 to MCS9, NSS = 1 to 4, VHT20 to VHT160) 802.11ax: 8.6 to 4804 (MCS0 to MCS11, NSS = 1 to 4, HE20 to HE160)
Packet aggregation	802.11n/ac/ax : A-MPDU and A-MSDU
Antenna type	Built-in omnidirectional antennas (four 2.4 GHz antennas, four 5 GHz antennas, 1 x Bluetooth antenna, 1 x GPS antenna)
Antenna gain	2.4 GHz: 5 dBi 5 GHz: 5.5 dBi
Maximum transmit power	2.4 GHz radio: 30 dBm (24 dBm per chain) 5 GHz radio: 29 dBm (23 dBm per chain) Note: The transmit power is subject to local regulatory requirements. For details, see WLAN Country or Region Codes and Channel Compliance . Thailand 2.4 GHz to 2.4835 GHz: 20 dBm 5.470 GHz to 5.725 GHz: 30 dBm 5.725 GHz to 5.825 GHz: 30 dBm
Power increment	Increment of 1 dBm
Radio technologies	802.11b: Direct-Sequence Spread-Spectrum (DSSS) 802.11a/g/n/ac: Orthogonal Frequency-Division Multiplexing (OFDM) 802.11ax: Orthogonal Frequency Division Multiple Access (OFDMA)
Modulation types	802.11b: BPSK, QPSK, CCK 802.11a/g/n: BPSK, QPSK, 16-QAM, 64-QAM, 256-QAM 802.11ac: BPSK, QPSK, 16-QAM, 64-QAM, 256-QAM, 1024-QAM 802.11ax: BPSK, QPSK, 16-QAM, 64-QAM, 256-QAM, 1024-QAM

The following table lists the radio frequency performance of Wi-Fi including different frequency bands, protocols, and data rates. It is country-specific, and Ruijie Networks reserves the right of interpretation.

Wi-Fi Radio Frequency Performance	RG-AP680P-L		
Frequency Band and Protocol	Data Rate	Maximum Transmit Power per Transmit Chain	Maximum Receive Sensitivity per Receive Chain
2.4 GHz 802.11b	1 Mbps	24 dBm	-94 dBm
	2 Mbps	24 dBm	-91 dBm
	5.5 Mbps	23 dBm	-90 dBm
	11 Mbps	22 dBm	-88 dBm
2.4 GHz 802.11g	6 Mbps	24 dBm	-89.5 dBm
	24 Mbps	23 dBm	-83 dBm
	36 Mbps	23 dBm	-79 dBm
	54 Mbps	21 dBm	-73 dBm
2.4 GHz 802.11n (HT20)	MCS0	24 dBm	-86 dBm
	MCS7	21 dBm	-68 dBm
2.4 GHz 802.11n (HT40)	MCS0	24 dBm	-83 dBm
	MCS7	21 dBm	-65 dBm
2.4 GHz 802.11ax (HE20)	MCS0	24 dBm	-86 dBm
	MCS11	19 dBm	-68 dBm
2.4 GHz 802.11ax (HE40)	MCS0	24 dBm	-83 dBm
	MCS11	19 dBm	-65 dBm
5 GHz 802.11a	6 Mbps	23 dBm	-89.5 dBm
	24 Mbps	22 dBm	-83 dBm
	36 Mbps	22 dBm	-79 dBm
	54 Mbps	20 dBm	-73 dBm
5 GHz 802.11n (HT20)	MCS0	23 dBm	-86 dBm
	MCS7	20 dBm	-68 dBm
5 GHz 802.11n (HT40)	MCS0	23 dBm	-83 dBm
	MCS7	20 dBm	-65 dBm
5 GHz 802.11ac (VHT20)	MCS0	23dBm	-86 dBm
	MCS9	19 dBm	-61 dBm
5 GHz 802.11ac (VHT40)	MCS0	23 dBm	-83 dBm
	MCS9	19 dBm	-57 dBm
5 GHz 802.11ac (VHT80)	MCS0	23 dBm	-80 dBm
	MCS9	19 dBm	-53 dBm
5 GHz 802.11ax (HE20)	MCS0	23 dBm	-86 dBm
	MCS11	16 dBm	-58 dBm
5 GHz 802.11ax (HE40)	MCS0	23 dBm	-83 dBm
	MCS11	16 dBm	-54 dBm
5 GHz 802.11ax (HE80)	MCS0	23 dBm	-80 dBm
	MCS11	16 dBm	-52 dBm
5 GHz 802.11ax (HE160)	MCS0	23 dBm	-77 dBm
	MCS11	16 dBm	-49 dBm

Bluetooth Radio

Bluetooth Radio	RG-AP680P-L
Bluetooth	Bluetooth 5.1
Antenna type	Integrated omnidirectional antenna
Maximum antenna gain	2 dBi
Maximum transmit power	10 dBm
Receive sensitivity	-88 dBm (@BLE)

Ports Specifications

Ports Specifications	RG-AP680P-L
Fixed service port	1 x 10GE SFP+ port, compatibility with 1GE and 2.5GE modules 1 x 100/1000/2.5G/5GBASE-T port • Auto MDI/MDIX crossover • NBASE-T/IEEE802.3bz-compliant 5 Gbps • PoE-PD: 48 V DC (nominal value) 802.3af/at/bt (Class 3 or higher) • 802.3az EEE 1 x 100/1000BASE-T port • Supplying 48 V/12.95 W power to an IoT unit • Auto MDI/MDIX crossover • 802.3az EEE
Fixed management port	1 x RJ45 console port (serial console port)
Status LED	1 x multi-color system status LED 3 x single-color RSSI LEDs
Button	1 x Reset button • Press the button for shorter than 2 seconds. Then the device restarts. • Press the button for longer than 5 seconds. Then the device restores to factory settings.

Power Supply and Consumption

Power Supply and Consumption	RG-AP680P-L
Input power supply	PoE input over LAN 1: The power source equipment (PSE) complies with IEEE 802.3af/at/bt standard (PoE/ PoE+/PoE++). • When powered by 802.3bt (PoE++), the AP operates with the optimal performance. • When powered by 802.3at (PoE+), the AP starts up normally. LAN 2 cannot supply power to external devices. • When powered by 802.3af (PoE), the AP starts up normally. Bluetooth and GPS work properly; all RF cards do not work; external power supply of the PSE is disabled.
Overall Power consumption	Maximum power consumption: 40 W • PoE powered (802.3af): 12.95 W • PoE+ powered (802.3at): 25 W • PoE++ powered (802.3bt): 40 W • Idle mode: 10 W

Environment and Reliability	RG-AP680P-L
Temperature	Operating temperature: -40°C to +65°C (-40°F to +149°F) Storage temperature: -40°C to +85°C (-40°F to +185°F) Note: At an altitude in the range of 3,000–5,000 m (9,842.52–16,404.20 ft.), every time the altitude increases by 220 m (721.78 ft.), the maximum temperature decreases by 1°C (1.8°F).
Humidity	Operating humidity: 0% RH to 100% RH (non-condensing) Storage humidity: 0% RH to 100% RH (non-condensing)
Anti-corrosion rating	EN300 0019 Class C
IP rating	IP68
Environment standard	Storage and operating environment: NEBS GR-63-CORE_Issue3_2006 GB/T 2423.6-1995
Mean Time Between Failure (MTBF)	200,000 hours (22 years) at the operating temperature of 25°C (77°F)

Regulatory Compliance

Regulatory Compliance	RG-AP680P-L
Regulatory compliance	EN 55032 EN 55035 EN 61000-3-3 EN IEC 61000-3-2 EN 301 489-1 EN 301 489-3 EN 301 489-17 EN 300 328 EN 301 893 EN 300 440 FCC Part 15 EN IEC 62311 IEC 62368-1 EN 62368-1 IEC 60950-22

*For more country-specific regulatory information and approvals, contact your local sales agency.

Software Specifications

Applicable Software Version	RG-AP680P-L
Applicable software version	RGOS11.9(6)W3B6 or later

WLAN

WLAN	RG-AP680P-L
Recommended maximum number of active devices per AP	200
Maximum number of associated clients	1024 Note The number of associated clients varies according to the environment.
Maximum number of BSSIDs	32 (up to 16 BSSIDs per radio)
STA management	SSID hiding Each SSID can be configured with the authentication mode, encryption mechanism, and VLAN attributes independently. Remote intelligent perception technology (RIPT) Intelligent client identification technology Intelligent load balancing based on the STA quantity or traffic

WLAN	RG-AP680P-L
STA limiting	SSID-based STA limiting Radio-based STA limiting
Bandwidth limiting	STA/SSID/AP-based rate limiting
Wireless roaming	Layer 2 and Layer 3 roaming

Security

Security	RG-AP680P-L
Authentication and encryption	Remote Authentication Dial-In User Service (RADIUS) PSK and web authentication QR code-based guest authentication (used with the RG-WS series wireless access controller) SMS authentication (used with the RG-WS series wireless access controller) MAB authentication (used with the RG-WS series wireless access controller) Data encryption: WPA-TKIP, WPA-PSK, WPA2-AES, WPA3, WEP (64/128-bit)
Data frame filtering	Allowlist, static blocklist, and dynamic blocklist
ACL	Dynamic ACL assignment
CPP	Supported
NFPP	Supported

Routing and Switching

Routing and Switching	RG-AP680P-L
IP service	Static IPv4 address and DHCP-assigned IPv4 address NAT, FTP ALG, DNS ALG
Multicast	Multicast-to-unicast conversion
IPv6 basics	IPv6 addressing, Neighbor Discovery (ND), ICMPv6, IPv6 ping IPv6 DHCP client
IP routing	IPv4/IPv6 static routing
VPN	PPPoE client IPsec VPN

Management



Management	RG-AP680P-L
Network management	Fault inspection and alarm Information statistics and logging
Network management platform	Web-based management (Eweb)
User access management	Telnet, SSH, SNMP and TFTP-based management
Fat/Fit/Cloud mode switchover	When the AP works in Fit mode, it can be switched to Fat mode through an AC. When the AP works in Fat mode, it can be switched to Fit mode through the console port or Telnet. When the AP works in Cloud mode, it can be managed through Ruijie Cloud.

06



Antenna Pattern Plots

Horizontal Planes (Top View)

The following figures show the azimuth antenna pattern at 2.4 GHz and 5 GHz radios.

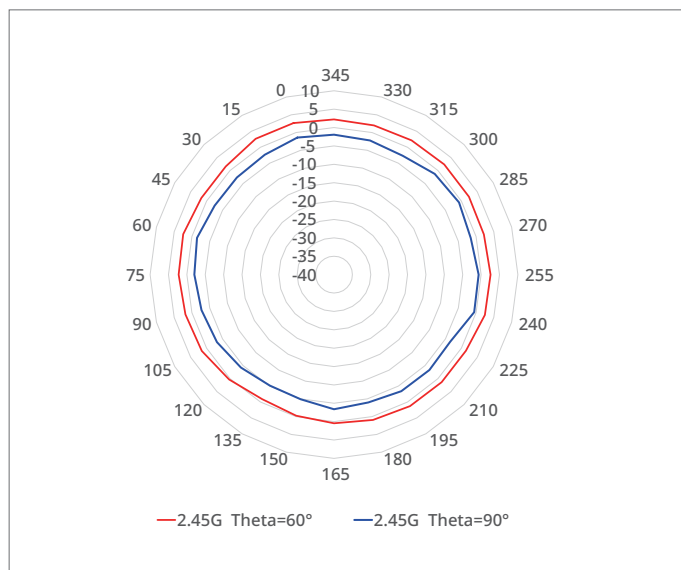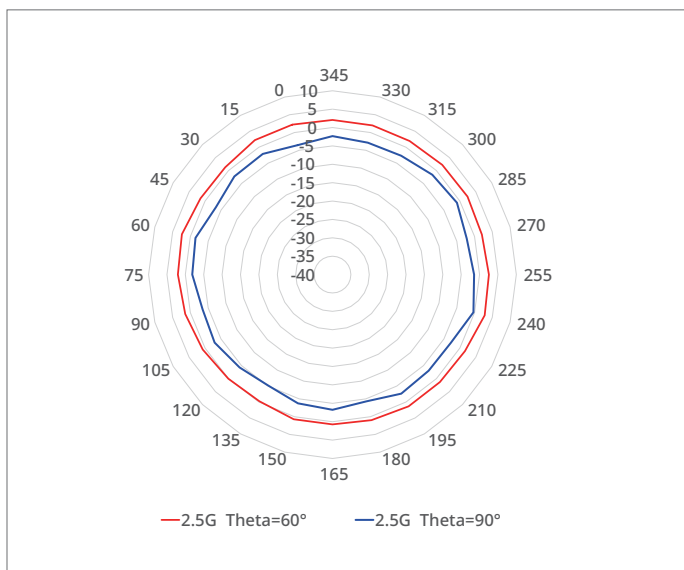



2.4 GHz (ANT1, 2, 3, 4)

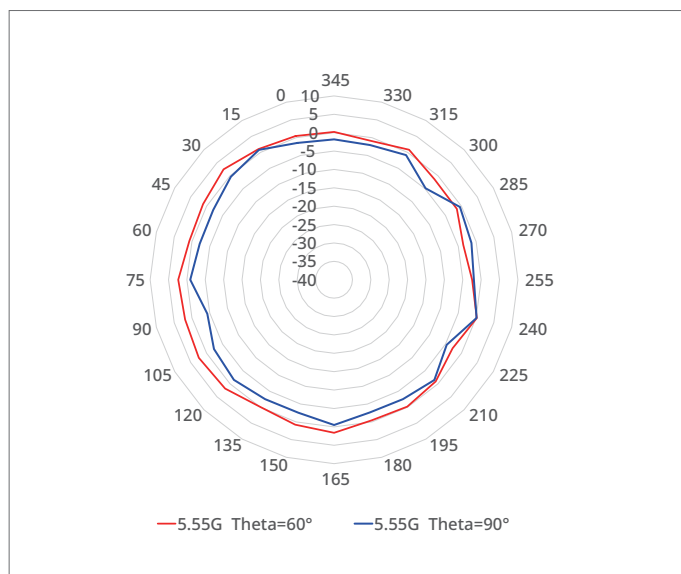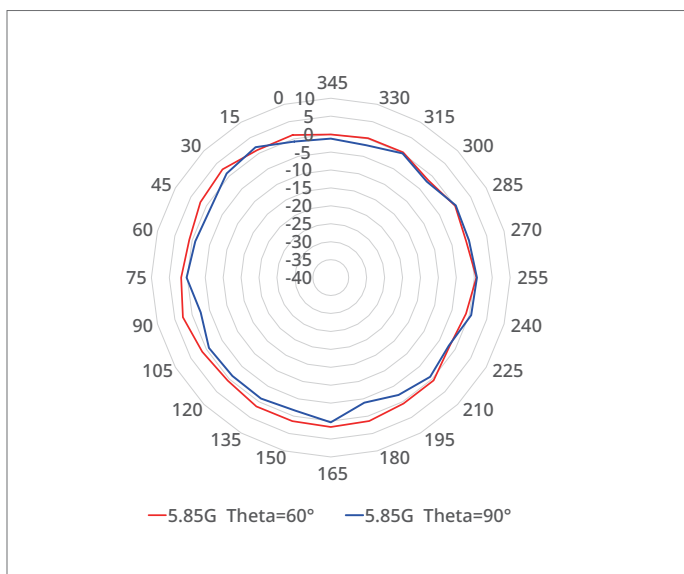



5.5 GHz (ANT1, 2, 3, 4)

Vertical Planes (Side View, AP Facing Down)

The following figures show the elevation antenna pattern at 2.4 GHz and 5 GHz radios.

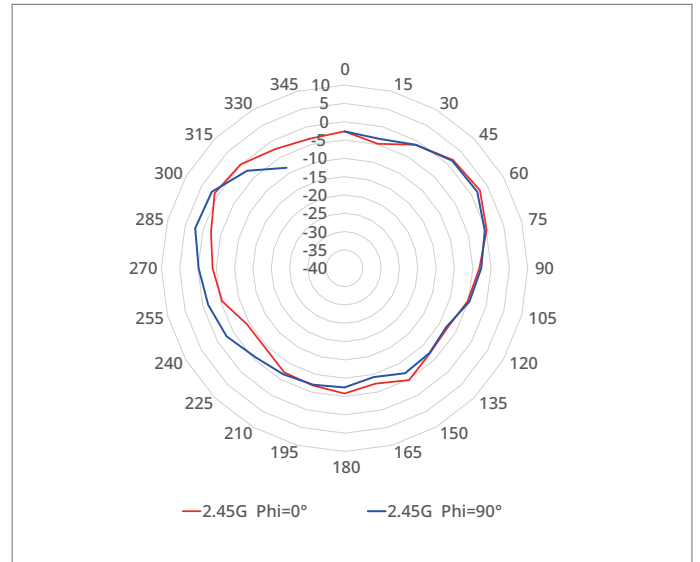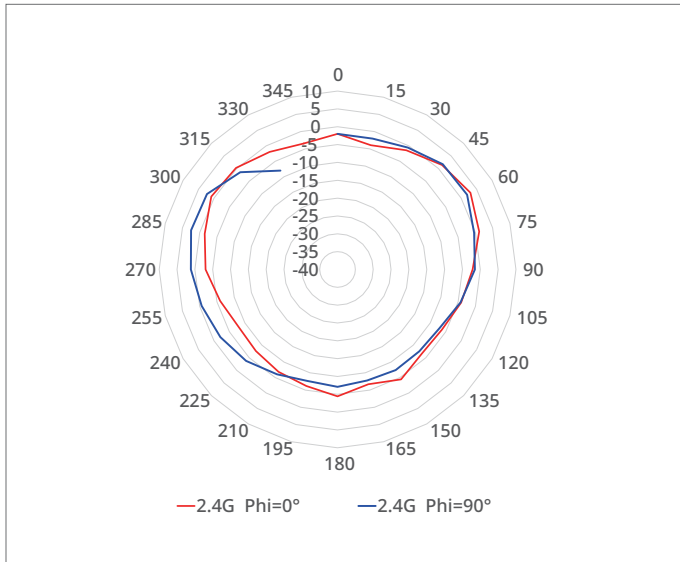

2.4 GHz (ANT1, 2, 3, 4)

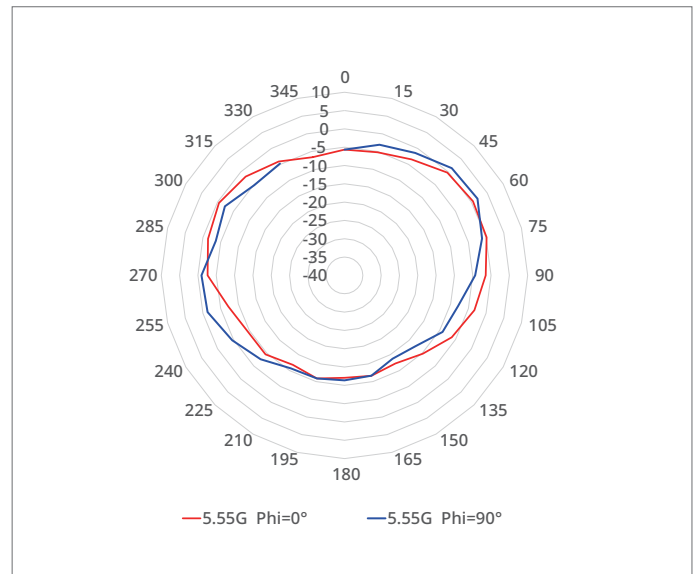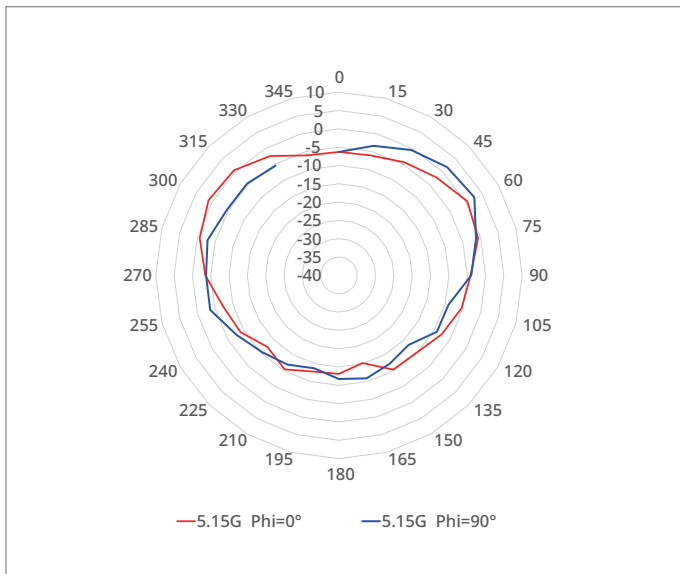


5.5 GHz (ANT1, 2, 3, 4)

Note: Operating frequency bands are country-specific.

07

Typical Scenario

Typical Scenario

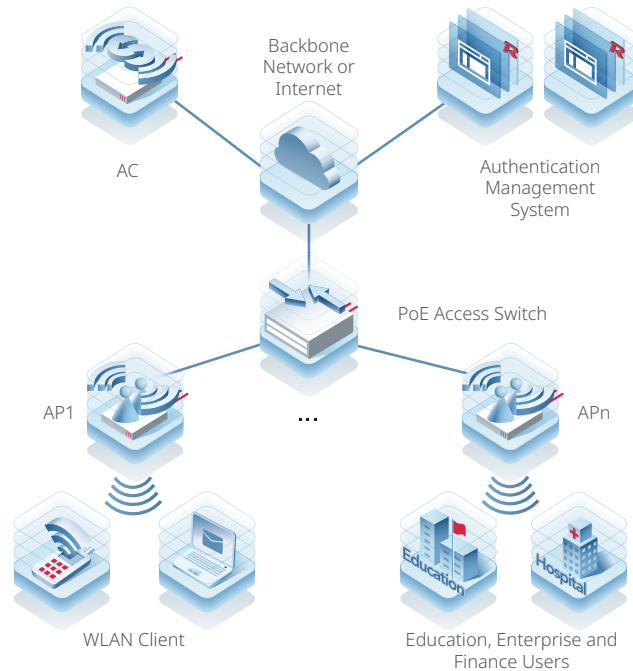

The AP is applicable to densely populated areas with simple building structures, no special obstructions, and a large capacity demand. Such areas cover the scenarios of higher education, wireless city, energy, and plaza. The AP can be flexibly deployed based on the environment.

Public Cloud Deployment

With Ruijie public cloud service, the RG-AP680P-L is fit for SME scenarios, including small offices, boutique hotels, and retail stores. Ruijie Networks provides customers with Ruijie Cloud lifetime free licenses. It significantly streamlines the IT operational efficiency, and simplifies wireless deployment with cost-effective options for SMEs.

The Ruijie Cloud service provides network provisioning, monitoring, optimization, operation, and maintenance. Devices can be easily deployed or swapped in plug-and-play mode. Automatic RF planning meets the needs of increasing user experience.

Cloud Management

- Unified device management
- Flexible group configuration

Mobile Operation


- Seamless provisioning
- Mobile monitoring & alarm notifications

Simplified Security

- Hotspot guest Wi-Fi (social login)

Cloud Analytics

- Automated Wi-Fi optimization
- Wi-Fi experience analysis

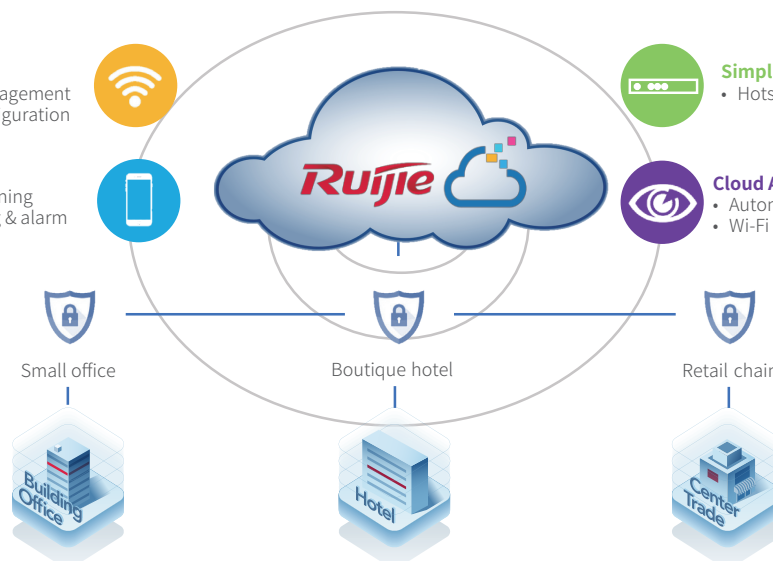


Key Features:

- Unified device management
- Fast provisioning by Cloud and App
- Captive portal & social media authentication
- App-based monitoring and alarm

Hybrid Cloud Deployment

For enterprise office, campus network, and hospitality customers with single or multiple sites, a hybrid mode consisting of Ruijie RG-WS series wireless access controller (on-premises) and cloud-based management (optional) is recommended for high-density AP deployment. Wireless access controllers are installed at the customer's site with fully integrated wireless management and authentication features, supporting large-scale AP management with cluster-based controller architecture. Optionally, the cloud management platform allows for value-added features such as centralized device configuration and monitoring, AI radio optimization, and reporting.

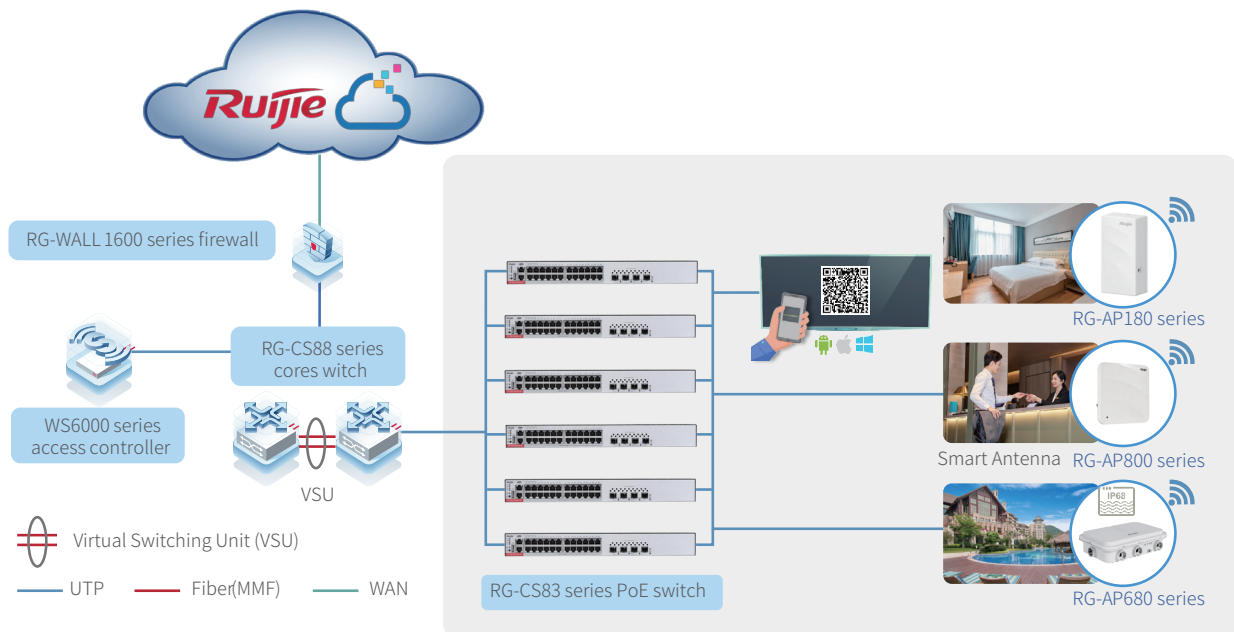

Key Features:

- Centralized device management and reporting by Ruijie Cloud
- Ultra-seamless roaming management
- AI radio optimization with one click
- High performance and security with all user authentication and traffic forwarding handled locally
- Flexible authentication options, including 802.1X and voucher authentication
- Unified management of all series of Ruijie APs

08

Ordering Information

Model	Description
RG-AP680P-L	Wi-Fi 6 dual-radio wireless access point Compliance with IEEE 802.11a/b/g/n/ac and 802.11ax standards Built-in omnidirectional antennas Up to eight spatial streams Data rate of up to 5.951 Gbps Fat/Fit/Cloud mode switchover Electrical and optical uplink ports IEEE 802.3af/at/bt-compliant (PoE/PoE+/PoE++) power supply

09

Package Contents

Item	Quantity
Main unit	1
Mounting plate assembly	1
Wall/Pole-mount bracket	1
M5 × 10 machine screw	4
M6 × 16 machine screw	2
M8 × 20 machine screw	2
M6 x 40 mm expansion anchor	4
Hose clamp	2
Watertight cable gland for the Ethernet cable and	0
power cord	2
Watertight cable gland for the optical cable	1
Dust cap	4
Grounding cable	1
Warranty Card	1
Quick Start Guide	1

10

Warranty

For more information about warranty terms and period, contact your local sales agency:

- Warranty terms: <https://www.ruijienetworks.com/support/servicepolicy>
- Warranty period: <https://www.ruijienetworks.com/support/servicepolicy/Service-Support-Summary/>

Note: The warranty terms are subject to the terms of different countries and distributors.

11

More Information

For more information about Ruijie Networks, visit the official Ruijie website or contact your local sales agency:

- Ruijie Networks official website: <https://www.ruijienetworks.com/>
- Online support: <https://www.ruijienetworks.com/support>
- Hotline support: <https://www.ruijienetworks.com/support/hotline>
- Email support: service_rj@ruijienetworks.com
- WLAN Country or Region Codes and Channel Compliance: https://www.ruijienetworks.com/support/documents/slide_wlan-country-codes-overview



Copyright ©2000-2023 Ruijie Networks Co., Ltd. All rights reserved.

No part of this document may be reproduced or transmitted in any form or any means without prior written consent of Ruijie Networks Co., Ltd.

Notice

This content is applicable only to regions outside the China mainland. Ruijie Networks Co., Ltd. reserves the right to interpret this content.

The information contained herein is subject to change without notice. Nothing herein should be construed as constituting an additional warranty. Ruijie Networks Co., Ltd. shall not be liable for technical or editorial errors or omissions contained herein.



Ruijie Networks Co., Ltd
Website: <https://www.ruijienetworks.com>