




Professional Copper

Code: *CABS10/GY/LSF/200*


Belden Style 9540 Cable | 10 Multi Core | TYPE 2 | Eca | LSF | Grey | 200m

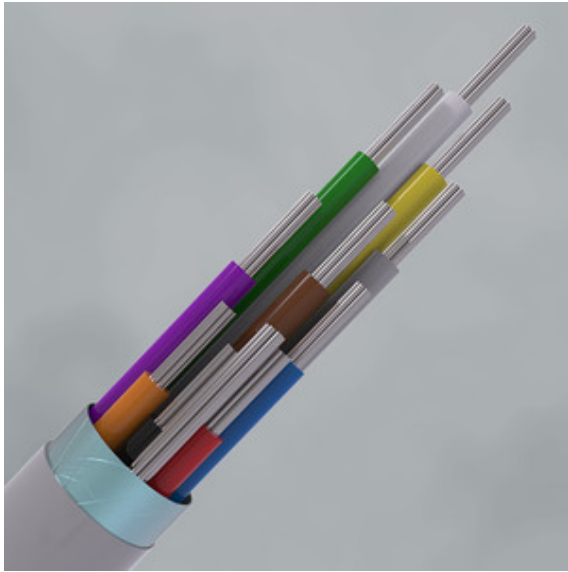

A cable designed by CQR to meet all aspects of the European Construction Product Regulation (CPR) EN50575. This cable has been independently tested and certified by an accredited test facility and has been awarded a CPR Euro classification. CQR offer the Installer, Specifier and End User a quality cabling solution and piece of mind that the product will perform to specification in the event of a fire.

Features & Benefits

- Belden Style 9540 cable
- Low smoke & fume sheath
- 100% copper cores
- Easy to strip & pliable in use
- Coloured rip cord for BS4737 identification
- EN50575 CPR certified

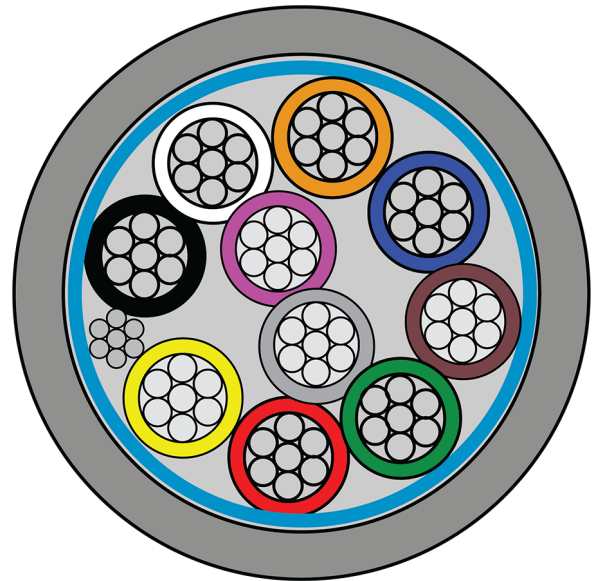

Product Information

Number of Cores	10
Multi or Solid	Multi
BS4737 Type	TYPE 2
Euro Class	Eca
Length (mtrs)	200
Sheathing Colour	Grey
Screened	Yes

Conductor

Conductor Type	Tinned Copper
Number of Strands in Core	7
CSA (mm ²)	0.207
AWG	24
Insulation Material	PVC
Insulation Colour	RD -BK-YL-BL-GR-WH-BN-OR-VI-GY
Insulation Resistance @20°C	≈ 200 MΩ/Km

Screen

Screen Material	Polyester / Ali foil
Drain Wire Material	Tinned Copper

Sheathing

Nylon Rip Cord Colour	Red
Sheathing	LSF
Sheathing Colour	Grey

Technical Data

Installation Temperature (°C)	+5°C to +40°C
Max Voltage	50V

