

Professional Copper

Code: *CABS4HF/WH/SO/100/D*


Intruder Alarm Cable | 4 Solid Core | TYPE 1 | Dca | LSZH | White | 100m



A cable designed by CQR to meet all aspects of the European Construction Product Regulation (CPR) EN50575. This cable has been independently tested and certified by an accredited test facility and has been awarded a CPR Euro classification. CQR offer the Installer, Specifier and End User a quality cabling solution and piece of mind that the product will perform to specification in the event of a fire.

Features & Benefits

- Low smoke zero halogen sheath
- 100% copper cores
- Easy to strip & pliable in use
- Coloured rip cord for BS4737 identification
- EN50575 CPR certified

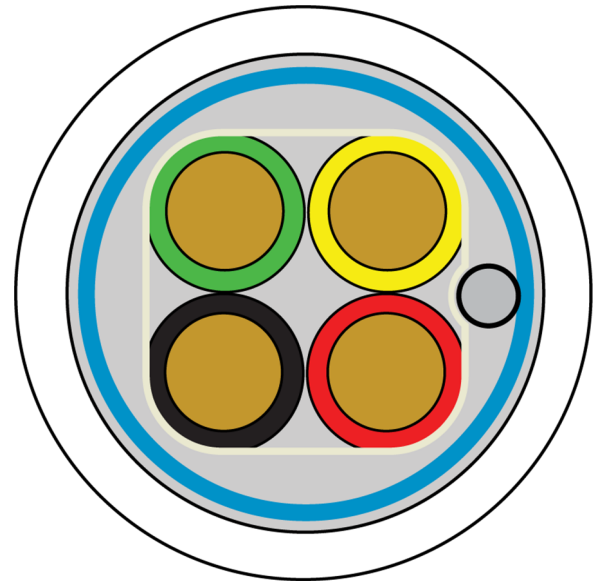

Product Information

Number of Cores	4
Multi or Solid	Solid
BS4737 Type	TYPE 1
Euro Class	Dca
Length (mtrs)	100
Sheathing Colour	White
Screened	Yes

Conductor

Conductor Type	Tinned Copper
Number of Strands in Core	1
CSA (mm ²)	0.454
AWG	21
Insulation Material	LSZH
Insulation Colour	RD-BK-YL-GN
Insulation Resistance @20°C	≈ 96 MΩ/Km

Screen

Screen Material	Polyester / Ali foil
Drain Wire Material	Tinned Copper

Sheathing

Nylon Rip Cord Colour	Green
Sheathing	LSZH
Sheathing Colour	White

Technical Data

Installation Temperature (°C)	-20°C to +85°C
Max Voltage	50V